


SPECIFICATIONS

Model	VH-650	NV50AA
Operating pressure	70–120 psi (4.9–8.3 bar) 5–8.5 kgf/cm ²	
Dimensions Length×Height×Width	10-11/32"×11-3/32"×4-13/16" (263mm×282mm×122mm)	9-27/32"×9-13/16"×5-3/32" (250mm×249mm×129mm)
Weight	6.6 lbs(3 kg)	4.2 lbs(1.9 kg)
Nail capacity	300–385 nails(1 coil)	385 nails(1 coil)
Air consumption	.047 ft ³ /cycle at 100 psi (1.3 ltr/cycle at 6.9 bar) (1.3 ltr/cycle at 7 kgf/cm ²)	.035 ft ³ /cycle at 100 psi (.99 ltr/cycle at 6.9 bar) (.99 ltr/cycle at 7 kgf/cm ²)
Air inlet	3/8 NPT Thread	

NAIL SELECTION

Only nails shown in the Table below can be driven with this Nailer.
Nails are collated and coiled, as shown in the right figure.



Plastic-collated coil nails

Dimensions of nails


VH-650		NV50AA	
Min.	Max.	Min.	Max.
.215" (5.5 mm)	.245" (6.2 mm)	.228" (5.8 mm)	.288" (5.8 mm)
1-1/2" (38 mm)	2-1/2" (65 mm)	1-1/4" (32 mm)	2" (50 mm)
.083" (2.1 mm)	.099" (2.5 mm)	.083" (2.1 mm)	.083" (2.1 mm)

ACCESSORIES

⚠ WARNING

- Accessories other than those shown below can lead to malfunction and resulting injuries.

STANDARD ACCESSORIES

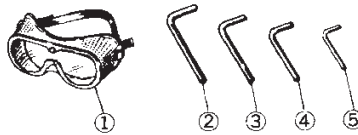

Model	VH-650	NV50AA
① Eye protector	1	1
② Allen wrench for M6 screw	1	
③ Allen wrench for M5 screw	1	
④ Allen wrench for M4 screw		1
⑤ Allen wrench for M3 screw		1