

DYNAPAC



Part of the Atlas Copco Group

CA134PDB

Single drum vibratory rollers



Technical data

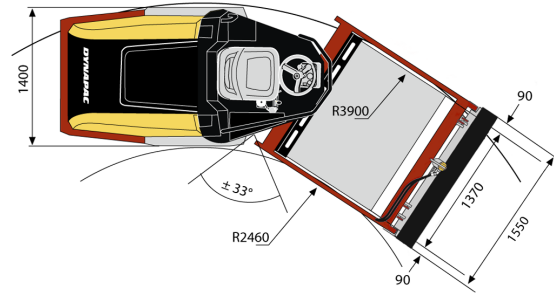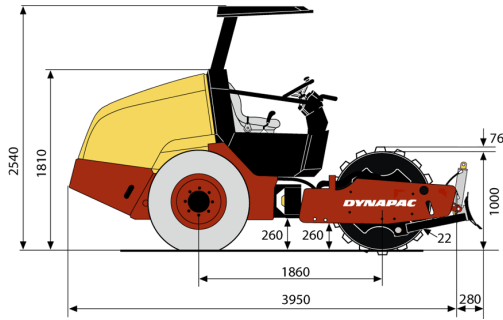

Masses		CA134PDB
Max. operating mass		5,200 kg
Operating mass (incl. ROPS)		5,000 kg
Module mass (front/ rear)		2,250/ 2,750 kg
Traction		
Speed range (km/ h)		0 - 6
Number of pads		72
Pad area		53 cm ²
Vertical oscillation		±9°
Tyre size (8 ply)		12,5-20
Theor. gradeability		52 %
Compaction		
Centrifugal force		89 kN
Nominal amplitude		1.5 mm
Vibration frequency		35 Hz
Engine		
Manufacturer/ Model		John Deere 5030 HF285
Type		Water cooled turbo Diesel with After Cooler
Rated power, SAE J1995		62 kW (84 hp) @ 2,800 rpm
Fuel tank capacity		117 l
Hydraulic system		
Driving		Axial piston pump with variable displacement. Axial piston motor with variable displacement. Axial piston motor with constant displacement. Gear pump/ motor with constant displacement.
Vibration		Gear pump with constant displacement.
Steering		Hydrostatic in forward and reverse lever.
Service brake		Failsafe multidisc brake in rear axle and front drum motor.
Parking/ Emergency brake		

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

ca134pdb_en-20100427.091711.pdf 2010-04-27 09:17